


AVAILABLE
TODAY

Manufactured in Maine, USA

Dielectrics HT6E12F-15k VHG filter uses proven cavity and interdigital resonator design techniques to provide the broadcaster unrivaled efficiency in a small footprint. The 15 kW 6-pole filter is tunable through high band VHF using a simple folded design requiring minimal space. The filter is convection cooled, allowing easy floor or ceiling mount installation.

Key Features:

- Efficient high band VHF tunable filter
- ATSC 3.0 compatible
- 15 kW convection cooled
- Cross coupled for increased rejection
- Temperature compensated
- DC short at input/output
- Compact folded design for space-limited sites

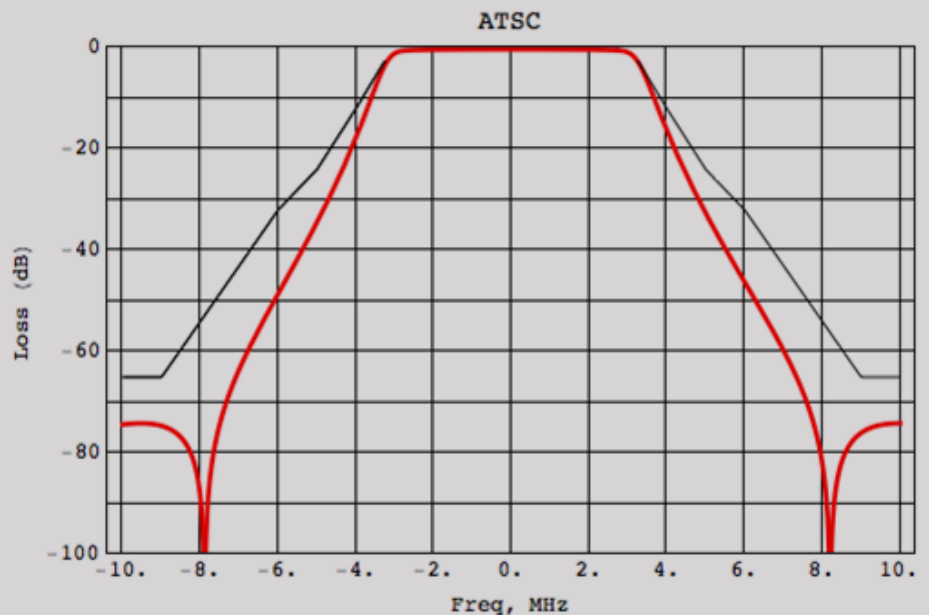

Trusted for Decades. Ready for Tomorrow.

VHF HIGH BAND 6-POLE TUNABLE FILTER 15K

PARAMETER	SPEC
Port Size	3 1/8" NF
Maximum Input Power	15 kW ave.
Frequency Range	170-213 MHz
Standard	ATSC/DVB-T
Insertion Loss (fo)	.10 dB max
Insertion Loss (fo +/- 2.69 MHz)	.15 dB max
Rejection (ATSC) fo +/- 3.25 MHz fo +/- 4.00 MHz fo +/- 5.00 MHz fo +/- 6.00 MHz fo +/- 9.00 MHz	2.5 dB 12 dB 24 dB 32 dB 64 dB
Group Delay Variation	200 ns max
Input Return Loss	28 dB min
Weight	410 lbs (186 kg)
Length x Width x Height	48 x 28 x 36 in 122 x 72 x 92 cm
Ambient Temp Range	10° C to 40° C
Material	Aluminum/Copper
Cooling	Convection
Temperature Stability	< 3 kHz / C
Thermal Compensation	Compensated Resonator
Power Rating at Altitude	13.8 kW at 1000 ft 13 kW at 2000 ft 10 kW at 5000 ft
Model Number	HT6E12F-15k

All specifications are subject to change.



Dielectric[®]

Trusted for Decades. Ready for Tomorrow.

22 Tower Rd., Raymond, ME 04071 USA • 1-800-341-9678 • Dielectric.com