



STANDARD COAXIAL 4-PORT MOTORIZED SWITCH 6 1/8" EIA

- Low insertion loss
- Low VSWR
- Motor drive switching
- Indoor applications
- Emergency manual operation
- Pressurized upon request
- Two-way switches

Specifications

Model Number	DC 60000-600	DC 60000-605
Input/output Connectors	6 1/8" EIA	6 1/8" EIA
Impedance	50 ohms	50 ohms
Peak Voltage ¹ at Sea Level	12 kV	12 kV
Frequency Range ¹	DC 800 MHz	DC 800 MHz
Max. Altitude ²	10,000 feet (3,050 m)	10,000 feet (3,050 m)
Ambient Temperature	32°F (0°C) to 113°F (45°C)	32°F (0°C) to 113°F (45°C)
Storage Temperature	32°F (0°C) to 122°F (50°C)	32°F (0°C) to 122°F (50°C)
Storage/ Ambient Humidity ³	0-98% non condensing	0-98% non condensing

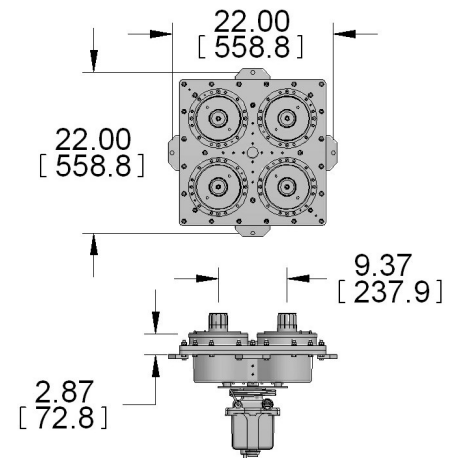

Average Power⁴

108 MHz	≤ 136.3 kW	≤ 136.3 kW
230 MHz	≤ 94.1 kW	≤ 94.1 kW
776 MHz	≤ 50.7 kW	≤ 50.7 kW
Insertion Loss	≤ 0.1 dB	≤ 0.1 dB
VSWR	≤ 1.05	≤ 1.05
Isolation	> 60 dB	> 60 dB
Switching Time	4 sec.	4 sec.

Electrical Data

Motor Operating Voltage	115 V AC/50/60 Hz	230 V AC/50/60 Hz
Motor Operating Current	1.25 Amps-start 0.6 Amps-run	0.924 Amps-start 0.5 Amps-run
Control Voltage	12,/24 V DC, 115/230 V AC	12,/24 V DC, 115/230 V AC

Limit Switches Rating⁵


Voltage	125/230 V AC	125/230 V AC
Current	1/3HP, 10 Amps	1/3HP, 10 Amps
Weight	170 lbs (77 kg)	170 lbs (77 kg)

Notes

- 1) Special operating frequency requests beyond specified operating range accepted. Call factory for details.
- 2) For more than 5,000 feet (1,524 m), please consult the factory.
- 3) Coaxial switches must not be exposed to condensing moisture environments.
- 4) 104°F (+40°C) ambient temperature, 145°F (63°C) outer temperature, 248°F (120°C) inner temperature, sea level, 0 PSIG, VSWR=1.0
- 5) Limit Switches are used for readout and position indication.

STANDARD COAXIAL 4-PORT MOTORIZED SWITCH 6 1/8" EIA

Control & Monitor Connector Pin Assignment Diagram

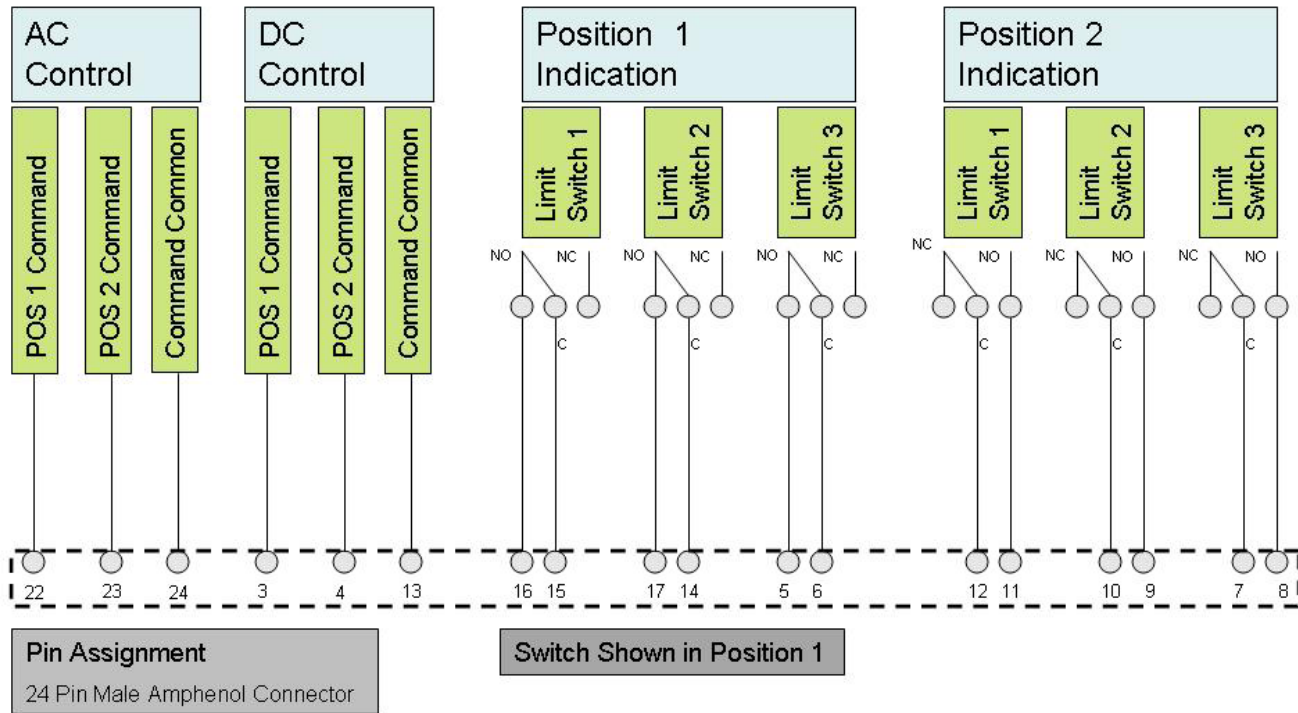

Electrical Block Diagram

